

OVERALL SYSTEM	
RECOMMENDED WORKSPACE	14 m <sup>2</sup> (150 ft <sup>2</sup> )
RECOMMENDED CEILING HEIGHT	2.7 m (9 ft)
FRESH HASH INPUT (PER 50L REACTOR VOLUME)	12.5 kg (27.5 lb)
OIL INPUT (PER RUN)	DEPENDENT ON HASH INPUT
FILTERED WATER INPUT (PER RUN)	
SINGLE RUN TIME	8-12 hr
POWER REQUIREMENTS (MULTIPLE CIRCUITS REQUIRED)	600 V / 3 Ph / 60 Hz / 130 A 480 V / 3 Ph / 60 Hz / 160 A
NOMINAL INPUT CURRENT	
LINE FUSE	
UNIT WEIGHT EMPTY	
UNIT WEIGHT FULL	

TERP REACTOR	
REACTOR VOLUME	200 L (53 USG)
MOTOR AND GEARBOX IP RATING	
316L WETTED MATERIALS, 8 RA WETTED SURFACE, FKM SEALS	
2 HP 3-BLADE AGITATOR, STAINLESS STEEL GEARBOX AND MOTOR	
OIL FILLED HEATING JACKET WITH HEATER, PUMP, AND CONTROL PANEL	
FILTER PRESS	
316L WETTED MATERIALS, 15 RA WETTED SURFACE, FKM SEALS	
FILTERED PARTICLE SIZE (OPTIONS AVAILABLE)	10 micron
PUMPS	
PUMP MOTOR IP RATING	
316L WETTED MATERIALS, 15 RA WETTED SURFACE, FKM SEALS	
3-A STANDARD, CIP CAPABLE, DRAIN PORT	
HOSES	
PLATINUM CURED SILICON, CIP & AUTOCLAVE CAPABLE	
COLLECTION AND DECANTING VESSEL	
316L WETTED MATERIALS, 8 RA WETTED SURFACE, FKM SEALS	
CIP CAPABLE, SWIVEL LOCKING CASTERS, DIAPHRAGM VALVE DRAIN	
COLLECTION VESSEL EQUIPPED WITH STRAINER BASKET	
AVAILABLE OPTIONS	
VACUUM ASSISTED FILTER	
316L WETTED MATERIALS, 8 RA WETTED SURFACE, FKM SEALS	
FILTERED PARTICLE SIZE (OPTIONS AVAIABLE)	10 micron
SUPPLIED WITH LABCONCO VACUUM PUMP	
CIP CART	
25% CAPACITY OF TERP REACTOR	
HEATED TANK, RINSE TANK, SUPPLY PUMP, SWIVEL LOCKING CASTERS	

# TR-200

## TERP REACTOR - CUT SHEET

Whistler Technologies products are warranted against defects for twelve months.

Enquire about our 6\* service program

DO NOT SCALE FROM SHEET

SCALE UNO: NTS


REV: A

SHEET: 1/1

WHISTLER TECHNOLOGIES CORPORATION

201 - 1420 ALPHA LAKE ROAD  
WHISTLER, BC  
CANADA V8E 0R8  
TEL: +1 604 962 1420  
whistlertechnologies.ca

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WHISTLER TECHNOLOGIES CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WHISTLER TECHNOLOGIES CORPORATION IS PROHIBITED.

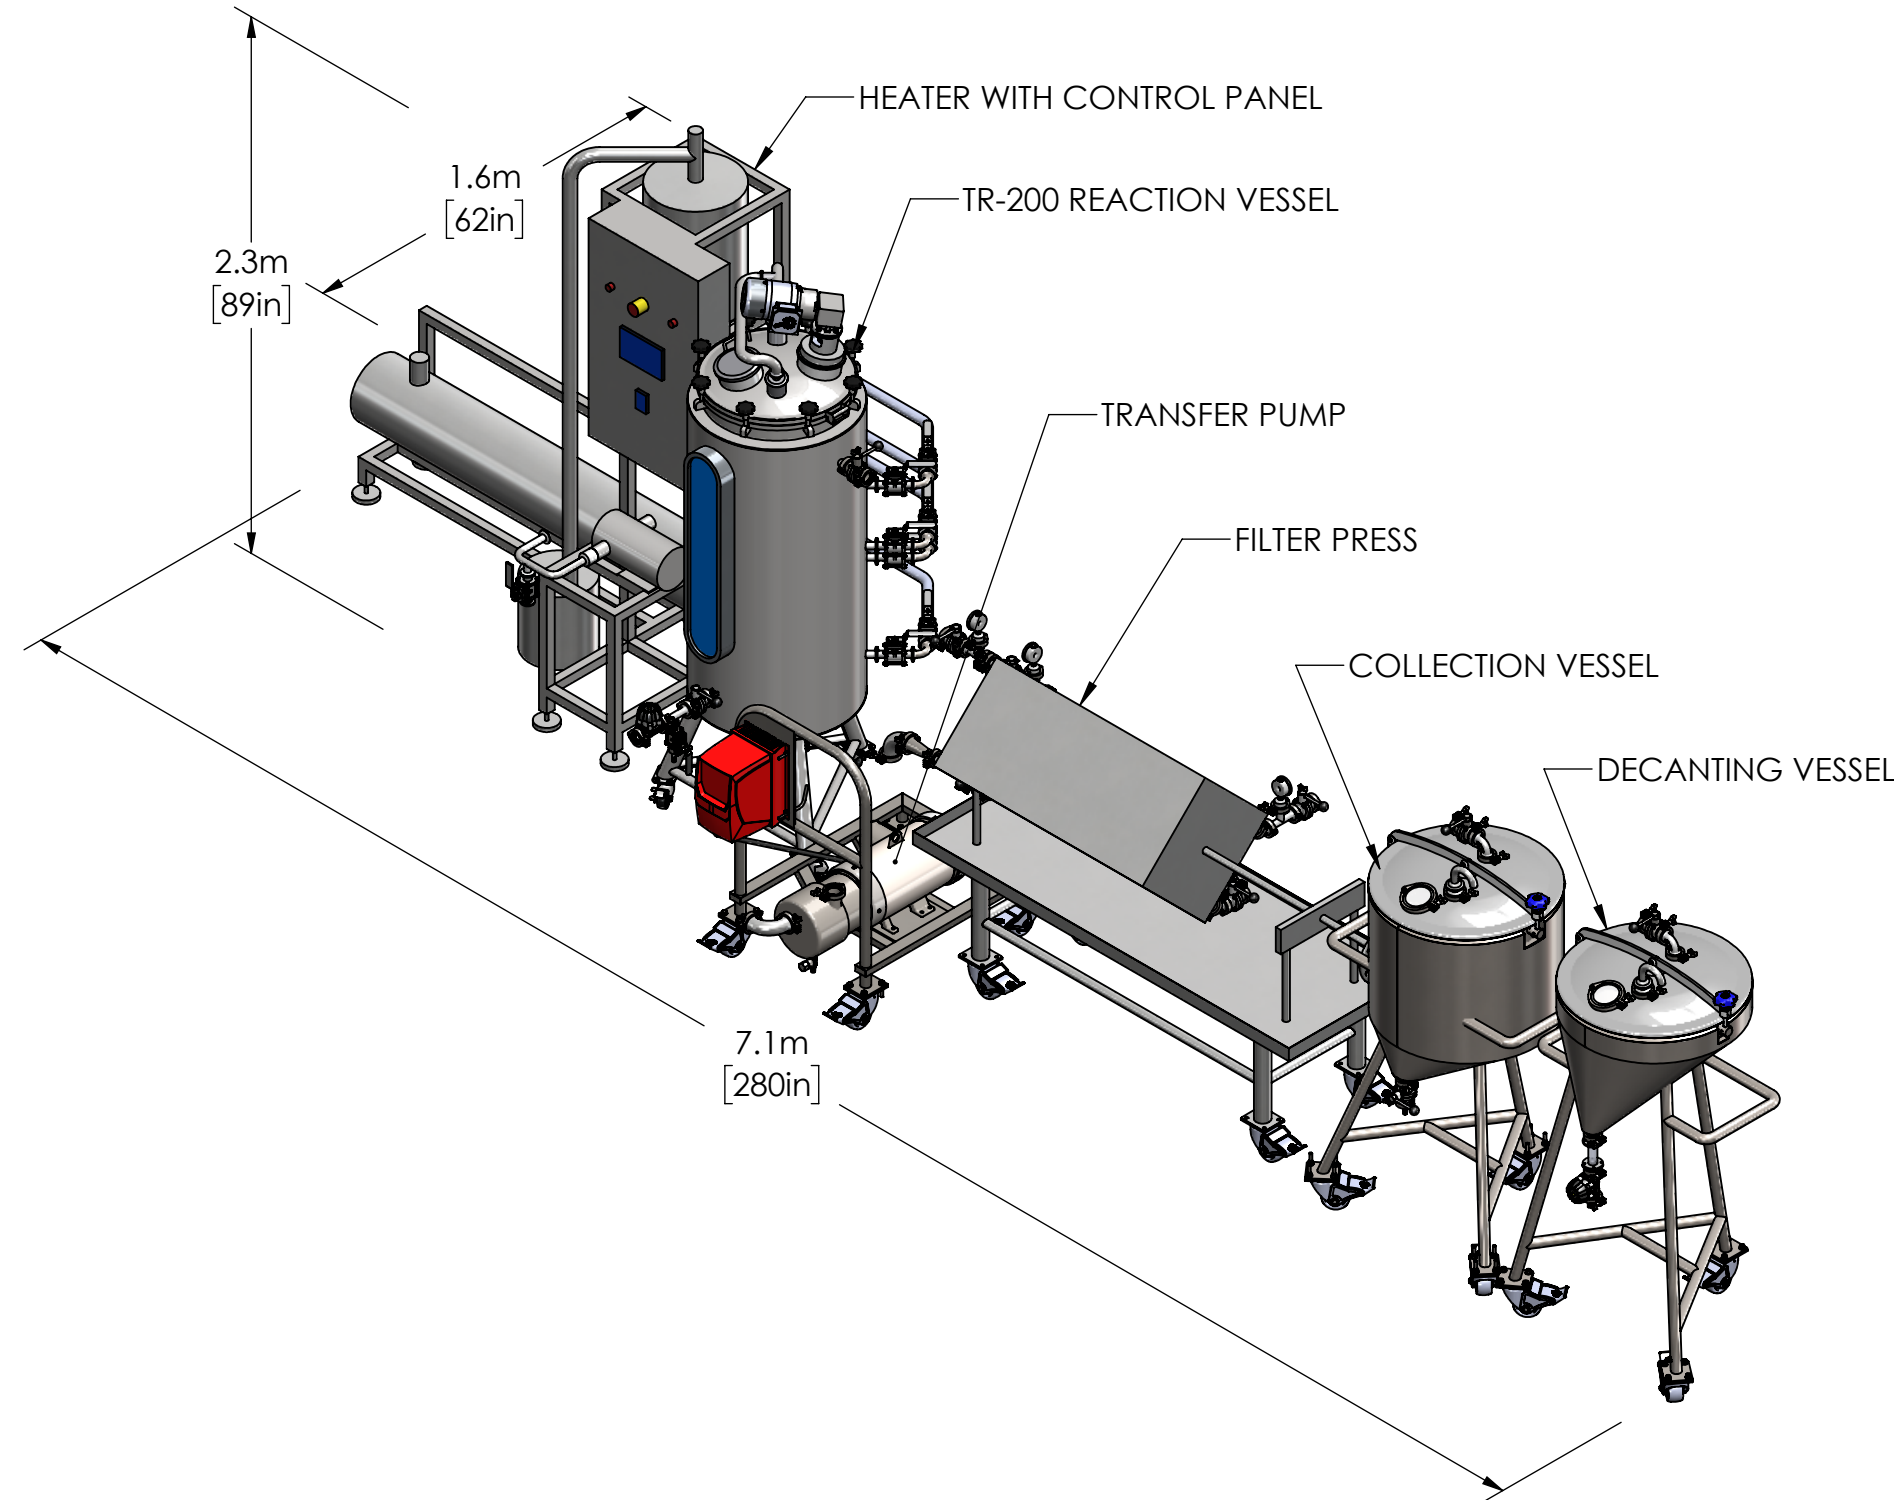

TERPENE ENRICHED OIL	
OIL VOLUME (PER 50 L REACTOR VOLUME)	25 L (6.6 USG)