

OVERALL SYSTEM	
RECOMMENDED WORKSPACE	8 m² (86 ft²)
RECOMMENDED CEILING HEIGHT	2 m (6.6 ft)
MAXIMUM FRESH HASH INPUT	12.6 kg (27.8 lb)
MAXIMUM OIL INPUT	25 L (6.6 USG)
FILTERED WATER INPUT	13 - 44 L (3.4 - 11.6 USG)
SINGLE RUN TIME	8-16 hr
POWER REQUIREMENTS	230 V / 3 Ph / 60 Hz
NOMINAL INPUT CURRENT	22.3 A
LINE FUSE	30 A
UNIT WEIGHT EMPTY	386 kg (850 lb)
UNIT WEIGHT FULL	436 kg (960 lb)

TERP REACTOR	
REACTOR VOLUME	50 L (13.2 USG)
ELECTRICAL HEATING BANDS ON VESSEL	
VIEW PORT TO ACCURATELY FLOAT 1ST AND 2ND QUALITY OIL FROM VESSEL	
PHARMA GRADE TEMPERATURE PROBE	
316L WETTED MATERIALS, 8 RA WETTED SURFACE, VITON SEALS	
FILTER FRIEND	
MESH SIZE - 1ST QUALITY OIL	25 micron
FILTERED PARTICAL SIZE - 2ND QUALITY OIL	5-25 micron (USER DEFINED)
SHAPED TO DECANT 2ND QUALITY OIL AND WATER	
CLEAR TUBE AND PINCH VALVE BELOW FILTER TO ACCURATELY DESPENSE OIL	
316L WETTED MATERIALS, 32 RA WETTED SURFACE, VITON SEALS	
ELECTRICAL SKID	
TOUCH SCREEN TO CONTROL HEATING, LIGHTING AND DISPLAY TEMPERATURE	
TRANSPORTS AND SUPPLIES POWER TO FILTER FRIEND VACUUM PUMP	
VACUUM PUMP	
VARIABLE PRESSURE UP TO A MAXIMUM OF 99% OF ATMOSPHERIC PRESSURE	
LIQUID TRAP INCLUDED TO SAFE-GUARD PUMP	
FLEXIBLE TRANSPARENT VACUUM LINES, PFA	
COLLECTION VESSELS	
3X LARGE (20 L) AND 2X SMALL (4 L) COLLECTION VESSELS	
316L CONTAINER AND LID, 10 RA SURFACE FINISH	

TR-50

50L TERP REACTOR - CUT SHEET

Whistler Technologies products are warranted against defects for twelve months.

Enquire about our 6* service program

DO NOT SCALE FROM SHEET

SCALE UNO: NTS


REV A

SHEET: 1/1

WHISTLER TECHNOLOGIES CORPORATION

201 - 1420 ALPHA LAKE ROAD
WHISTLER, BC
CANADA V8E 0R8
TEL: +1 604 962 1420
whistlertechnologies.ca

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WHISTLER TECHNOLOGIES CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WHISTLER TECHNOLOGIES CORPORATION IS PROHIBITED.

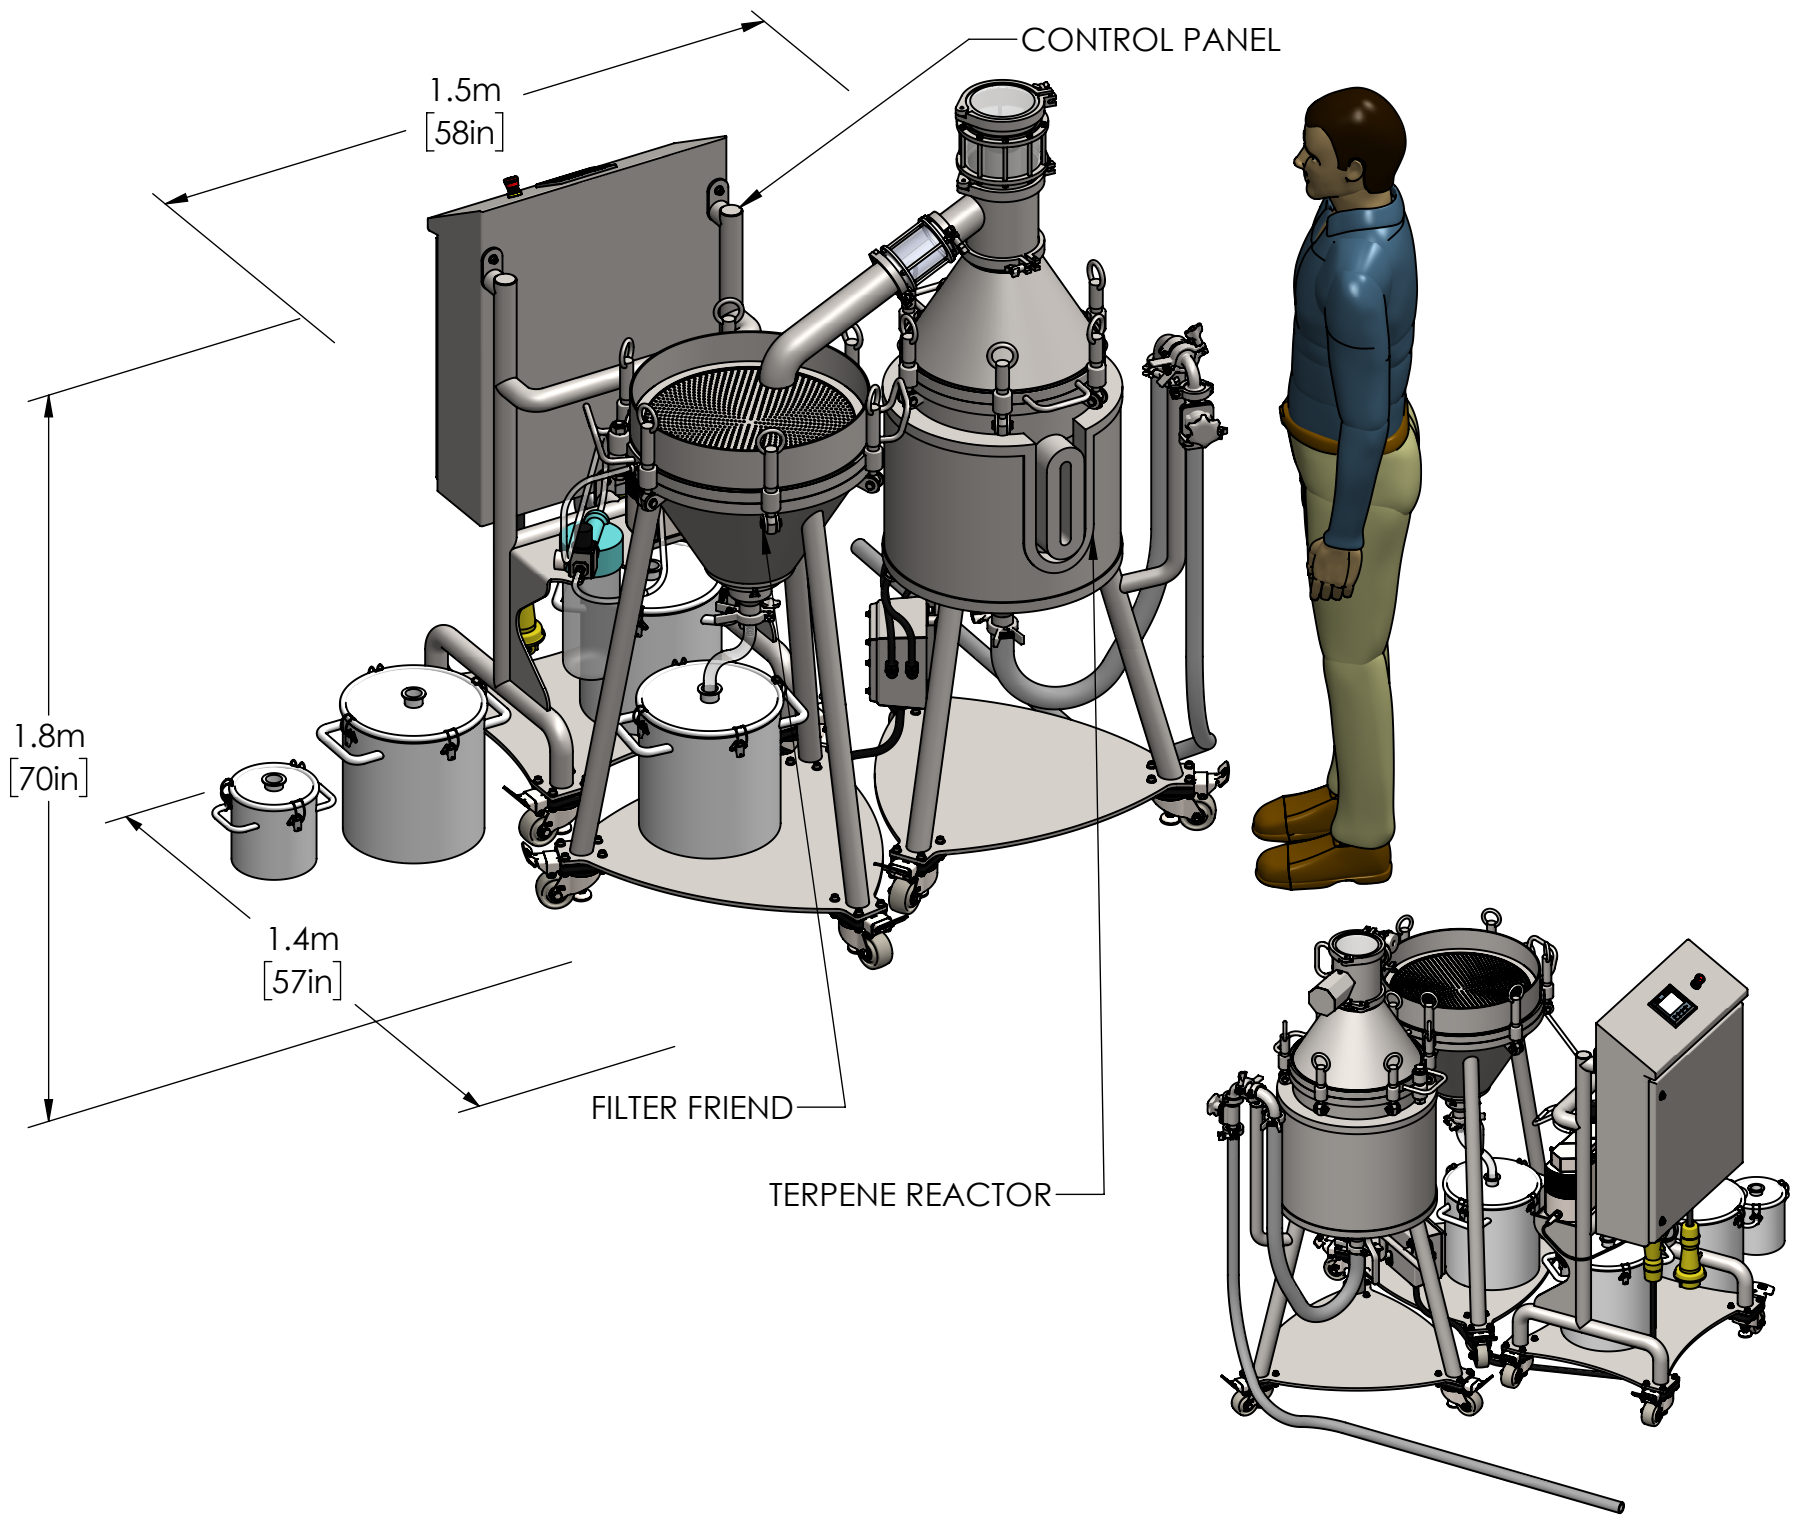

TERPENE ENRICHED OIL	
MAXIMUM OIL VOLUME OUTPUT PER RUN	25 L (6.6 USG)